
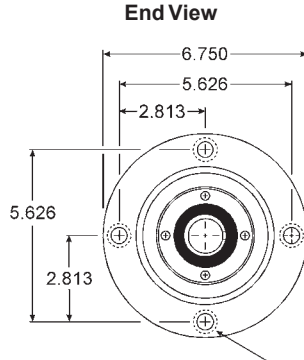
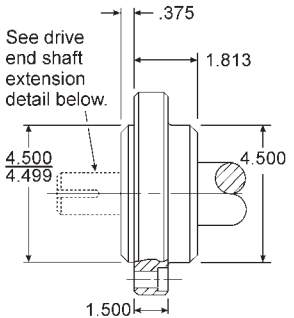
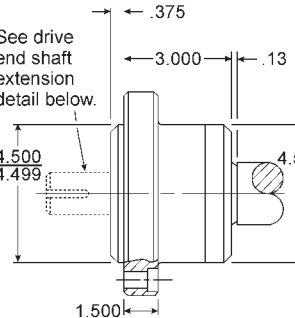
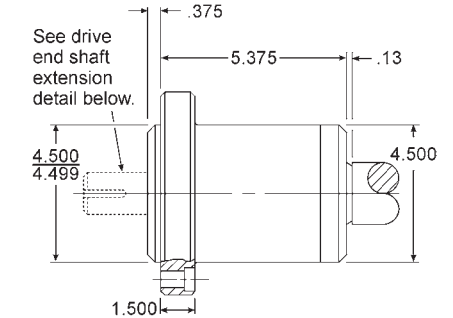
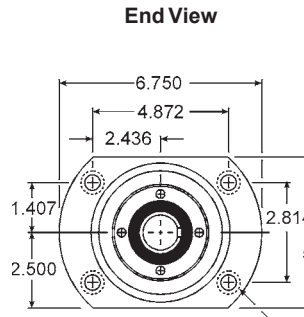
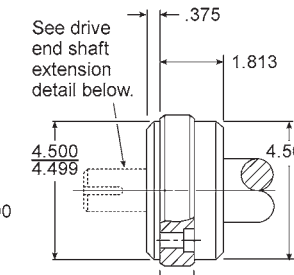
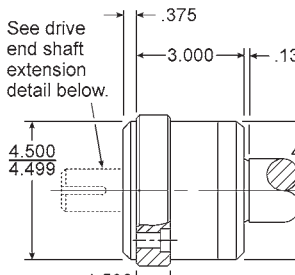


COMPTROL BEARING BLOCKS FOR 2.000 DIAMETER BALLSCREWS




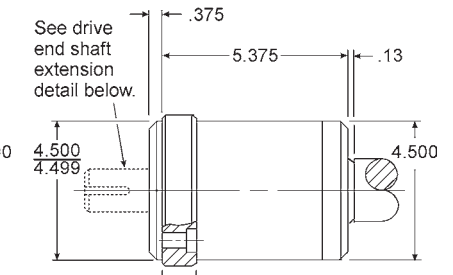


Flange Mount	Model	Shaft End	Model	Shaft End	Model	Shaft End
 <p>End View</p> <p>See mounting hole detail.</p>	66-205-A	Driven	66-205-B	Driven	66-205-C	Driven
	66-205-A1	Non-Driven	66-205-B1	Non-Driven	66-205-C1	Non-Driven
	 <p>See drive end shaft extension detail below.</p>		 <p>See drive end shaft extension detail below.</p>		 <p>See drive end shaft extension detail below.</p>	



Note: For each Type A or A1 bearing block required, add .250" to ballscrew thread length.

Cut-Off Flange Mount	Model	Shaft End	Model	Shaft End	Model	Shaft End
 <p>End View</p> <p>See mounting hole detail.</p>	66-305-A	Driven	66-305-B	Driven	66-305-C	Driven
	66-305-A1	Non-Driven	66-305-B1	Non-Driven	66-305-C1	Non-Driven
	 <p>See drive end shaft extension detail below.</p>		 <p>See drive end shaft extension detail below.</p>		 <p>See drive end shaft extension detail below.</p>	

Note: For each Type A or A1 bearing block required, add .250" to ballscrew thread length.

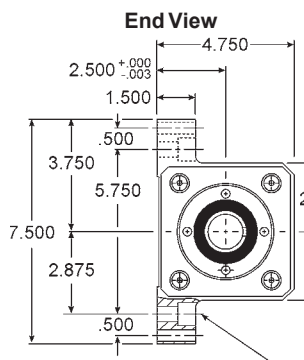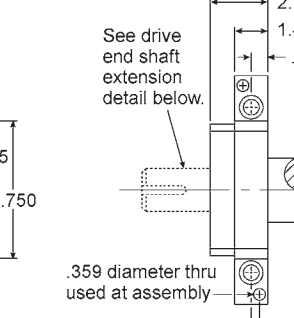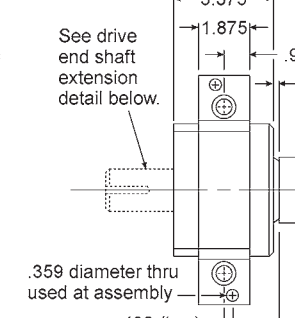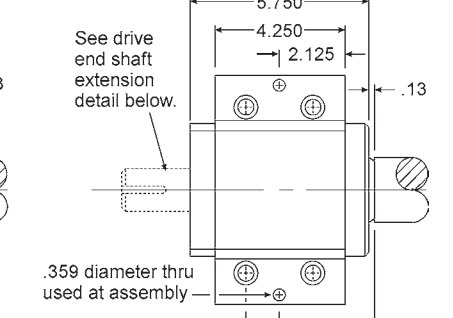Base Mount	Model	Shaft End	Model	Shaft End	Model	Shaft End
 <p>End View</p> <p>See mounting hole detail.</p>	66-405-A	Driven	66-405-B	Driven	66-405-C	Driven
	66-405-A1	Non-Driven	66-405-B1	Non-Driven	66-405-C1	Non-Driven
	 <p>See drive end shaft extension detail below.</p> <p>.359 diameter thru used at assembly</p>		 <p>See drive end shaft extension detail below.</p> <p>.359 diameter thru used at assembly</p>		 <p>See drive end shaft extension detail below.</p> <p>.359 diameter thru used at assembly</p>	

Note: For each Type A or A1 bearing block required, add .250" to ballscrew thread length.

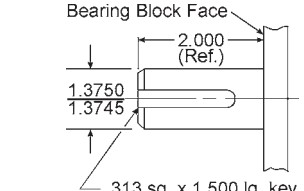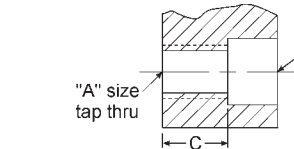Standard Drive Extension	Mounting Hole Detail	Model Number Designation												
 <p>Bearing Block Face</p> <p>2.000 (Ref.)</p> <p>1.3750</p> <p>1.3745</p> <p>.313 sq. x 1.500 lg. key</p> <p>Note: Special lengths available.</p>	 <p>"A" size tap thru</p> <p>Drilled & C'bored for "B" size socket head cap screw</p> <p>C</p>	<p>66 - X 0 5 - X X</p> <p>Bearing Block</p> <p>Mounting Style</p> <p>2 = Flange</p> <p>3 = Cut-Off Flange</p> <p>4 = Base</p> <p>2.000 Diameter Ballscrew</p> <p>Shaft End</p> <p>Blank = Driven</p> <p>1 = Non-Driven</p> <p>Bearing Type</p> <p>A = Radial</p> <p>B = Duplex</p> <p>C = Spaced</p>												
<table border="1"> <thead> <tr> <th>Mounting</th> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>Base</td> <td>5/8-11</td> <td>1/2-13</td> <td>1.000</td> </tr> <tr> <td>Flange & Cut-Off Flange</td> <td>3/4-10</td> <td>5/8-11</td> <td>1.125</td> </tr> </tbody> </table>	Mounting	A	B	C	Base	5/8-11	1/2-13	1.000	Flange & Cut-Off Flange	3/4-10	5/8-11	1.125		
Mounting	A	B	C											
Base	5/8-11	1/2-13	1.000											
Flange & Cut-Off Flange	3/4-10	5/8-11	1.125											

- Notes**
- All dimensions in inches unless otherwise specified.
 - Refer to Page 3 for Nominal Load Capacities.
 - End journals must be machined per dimensions on Page 13.
 - Custom and metric bearing block assemblies and/or drive end journals are available.
 - Dimensions and specifications subject to change without notice.