


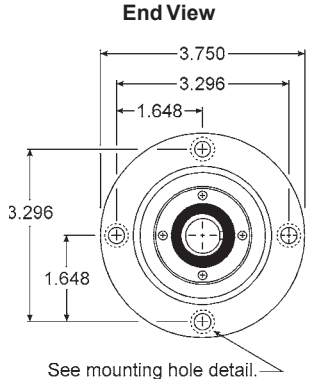


COMPTROL BEARING BLOCKS FOR 1.000 DIAMETER BALLSCREWS

Flange Mount

Flange Mount	Model	Shaft End	Model	Shaft End	Model	Shaft End
 <p style="text-align: center;">End View</p>	66-202-A	Driven	66-202-B	Driven	66-202-C	Driven
	66-202-A1	Non-Driven	66-202-B1	Non-Driven	66-202-C1	Non-Driven


Note: For each Type A or A1 bearing block required, add .125" to ballscrew thread length.

Cut-Off Flange Mount

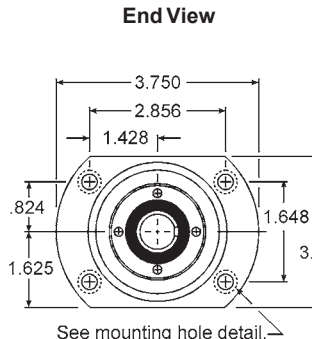Cut-Off Flange Mount	Model	Shaft End	Model	Shaft End	Model	Shaft End
 <p style="text-align: center;">End View</p>	66-302-A	Driven	66-302-B	Driven	66-302-C	Driven
	66-302-A1	Non-Driven	66-302-B1	Non-Driven	66-302-C1	Non-Driven


Note: For each Type A or A1 bearing block required, add .125" to ballscrew thread length.

Base Mount

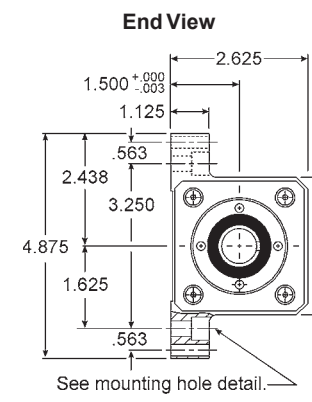Base Mount	Model	Shaft End	Model	Shaft End	Model	Shaft End
 <p style="text-align: center;">End View</p>	66-402-A	Driven	66-402-B	Driven	66-402-C	Driven
	66-402-A1	Non-Driven	66-402-B1	Non-Driven	66-402-C1	Non-Driven


Note: For each Type A or A1 bearing block required, add .125" to ballscrew thread length.

Standard Drive Extension Mounting Hole Detail Model Number Designation

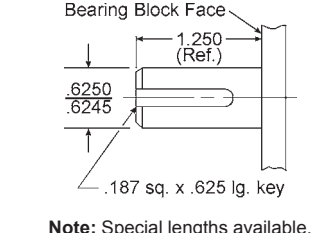

Bearing Block Face
1.250 (Ref.)
.6250
.6245
.187 sq. x .625 lg. key

Note: Special lengths available.

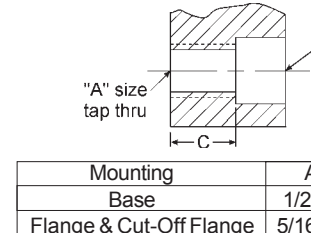

"A" size tap thru
C
Drilled & C'bored for "B" size socket head cap screw

Mounting	A	B	C
Base	1/2-20	7/16-14	0.625
Flange & Cut-Off Flange	5/16-24	1/4-20	0.750

66 - X 0 2 - X X

Bearing Block

Mounting Style

2 = Flange
3 = Cut-Off Flange
4 = Base

1.000 Diameter Ballscrew

Shaft End

Blank = Driven
1 = Non-Driven

Bearing Type

A = Radial
B = Duplex
C = Spaced

Notes

1. All dimensions in inches unless otherwise specified.
2. Refer to Page 3 for Nominal Load Capacities.
3. End journals must be machined per dimensions on Page 13.
4. Custom and metric bearing block assemblies and/or drive end journals are available.
5. Dimensions and specifications subject to change without notice.