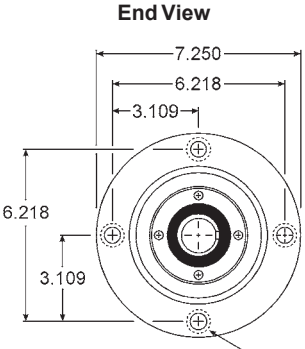
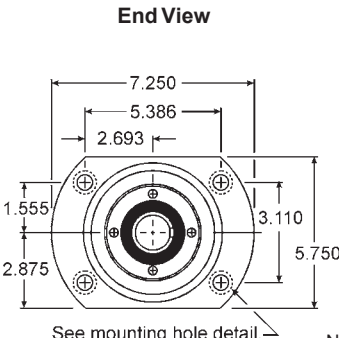


COMPTROL BEARING BLOCKS FOR 2.500 DIAMETER BALLSCREWS

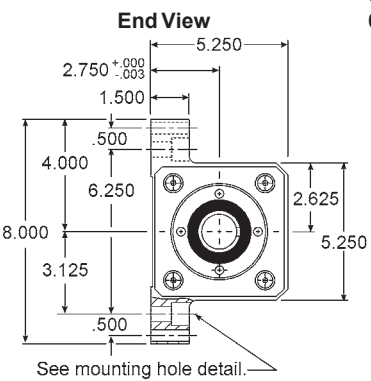


Flange Mount	Model	Shaft End	Model	Shaft End	Model	Shaft End
 <p>End View</p> <p>See mounting hole detail.</p>	66-207-A	Driven	66-207-B	Driven	66-207-C	Driven
	66-207-A1	Non-Driven	66-207-B1	Non-Driven	66-207-C1	Non-Driven



Note: For each Type A or A1 bearing block required, add .250" to ballscrew thread length.

Cut-Off Flange Mount	Model	Shaft End	Model	Shaft End	Model	Shaft End
 <p>End View</p> <p>See mounting hole detail.</p>	66-307-A	Driven	66-307-B	Driven	66-307-C	Driven
	66-307-A1	Non-Driven	66-307-B1	Non-Driven	66-307-C1	Non-Driven

Note: For each Type A or A1 bearing block required, add .250" to ballscrew thread length.

Base Mount	Model	Shaft End	Model	Shaft End	Model	Shaft End
 <p>End View</p> <p>See mounting hole detail.</p>	66-407-A	Driven	66-407-B	Driven	66-407-C	Driven
	66-407-A1	Non-Driven	66-407-B1	Non-Driven	66-407-C1	Non-Driven

Note: For each Type A or A1 bearing block required, add .250" to ballscrew thread length.

Standard Drive Extension	Mounting Hole Detail	Model Number Designation
 <p>Bearing Block Face</p> <p>2.380 (Ref.)</p> <p>1.8750</p> <p>1.8745</p> <p>.500 sq. x 1.500 lg. key</p> <p>Note: Special lengths available.</p>	 <p>"A" size tap thru</p> <p>Drilled & C'bored for "B" size socket head cap screw</p> <p>C</p>	<p>66-X07-XX</p> <p>Bearing Block</p> <p>Mounting Style</p> <p>2 = Flange</p> <p>3 = Cut-Off Flange</p> <p>4 = Base</p> <p>2.500 Diameter Ballscrew</p> <p>Shaft End</p> <p>Blank = Driven</p> <p>1 = Non-Driven</p> <p>Bearing Type</p> <p>A = Radial</p> <p>B = Duplex</p> <p>C = Spaced</p>

Notes

- All dimensions in inches unless otherwise specified.
- Refer to Page 3 for Nominal Load Capacities.
- End journals must be machined per dimensions on Page 13.
- Custom and metric bearing block assemblies and/or drive end journals are available.
- Dimensions and specifications subject to change without notice.