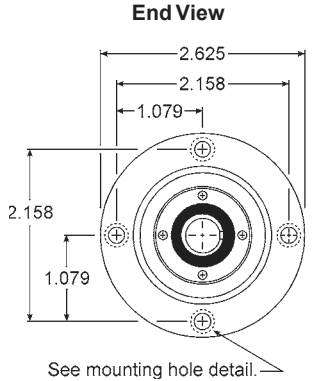
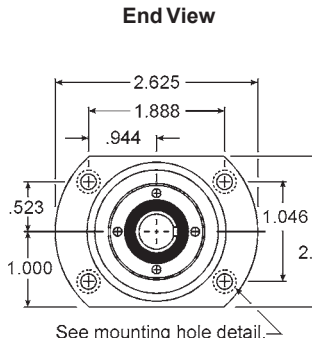




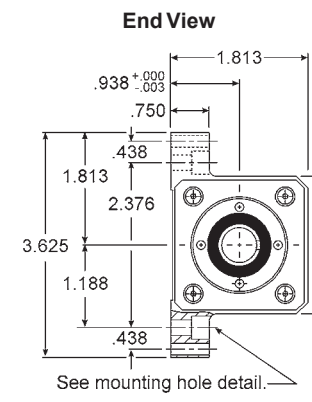
COMPTROL BEARING BLOCKS FOR .625 DIAMETER BALLSCREWS

Flange Mount	Model	Shaft End	Model	Shaft End	Model	Shaft End
 <p>End View</p> <p>See mounting hole detail.</p>	66-200-A	Driven	66-200-B	Driven	66-200-C	Driven
	66-200-A1	Non-Driven	66-200-B1	Non-Driven	66-200-C1	Non-Driven

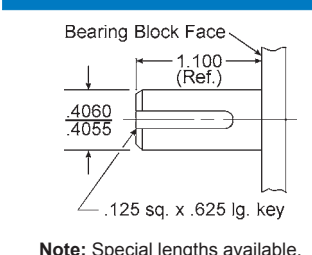
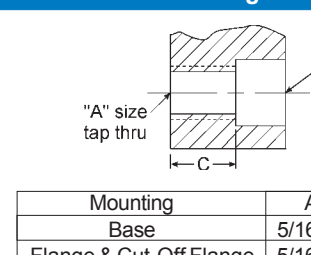
Note: For each Type A or A1 bearing block required, add .125" to ballscrew thread length.

Cut-Off Flange Mount	Model	Shaft End	Model	Shaft End	Model	Shaft End
 <p>End View</p> <p>See mounting hole detail.</p>	66-300-A	Driven	66-300-B	Driven	66-300-C	Driven
	66-300-A1	Non-Driven	66-300-B1	Non-Driven	66-300-C1	Non-Driven

Note: For each Type A or A1 bearing block required, add .125" to ballscrew thread length.

Base Mount	Model	Shaft End	Model	Shaft End	Model	Shaft End
 <p>End View</p> <p>See mounting hole detail.</p>	66-400-A	Driven	66-400-B	Driven	66-400-C	Driven
	66-400-A1	Non-Driven	66-400-B1	Non-Driven	66-400-C1	Non-Driven

Note: For each Type A or A1 bearing block required, add .125" to ballscrew thread length.

Standard Drive Extension	Mounting Hole Detail	Model Number Designation
 <p>Bearing Block Face</p> <p>1.100 (Ref.)</p> <p>4060</p> <p>4055</p> <p>.125 sq. x .625 lg. key</p> <p>Note: Special lengths available.</p>	 <p>"A" size tap thru</p> <p>Drilled & C'bored for "B" size socket head cap screw</p> <p>C</p>	<p>66 - X 0 0 - X X</p> <p>Bearing Block</p> <p>Mounting Style</p> <p>2 = Flange</p> <p>3 = Cut-Off Flange</p> <p>4 = Base</p> <p>.625 Diameter Ballscrew</p> <p>Shaft End</p> <p>Blank = Driven</p> <p>1 = Non-Driven</p> <p>Bearing Type</p> <p>A = Radial</p> <p>B = Duplex</p> <p>C = Spaced</p>

- ### Notes
- All dimensions in inches unless otherwise specified.
 - Refer to Page 3 for Nominal Load Capacities.
 - End journals must be machined per dimensions on Page 13.
 - Custom and metric bearing block assemblies and/or drive end journals are available.
 - Dimensions and specifications subject to change without notice.