




**TENSIONCELL MODEL A30 SHEAVE OR PULLEY MOUNTING**

CAPACITY RANGE (lbs)											
NOMINAL	0-4	0-8	0-13	0-20	0-30	0-50	0-90	0-140	0-200	0-300	0-500
CODE	L*	M*	N	P	S	T	U	CONSULT FACTORY			

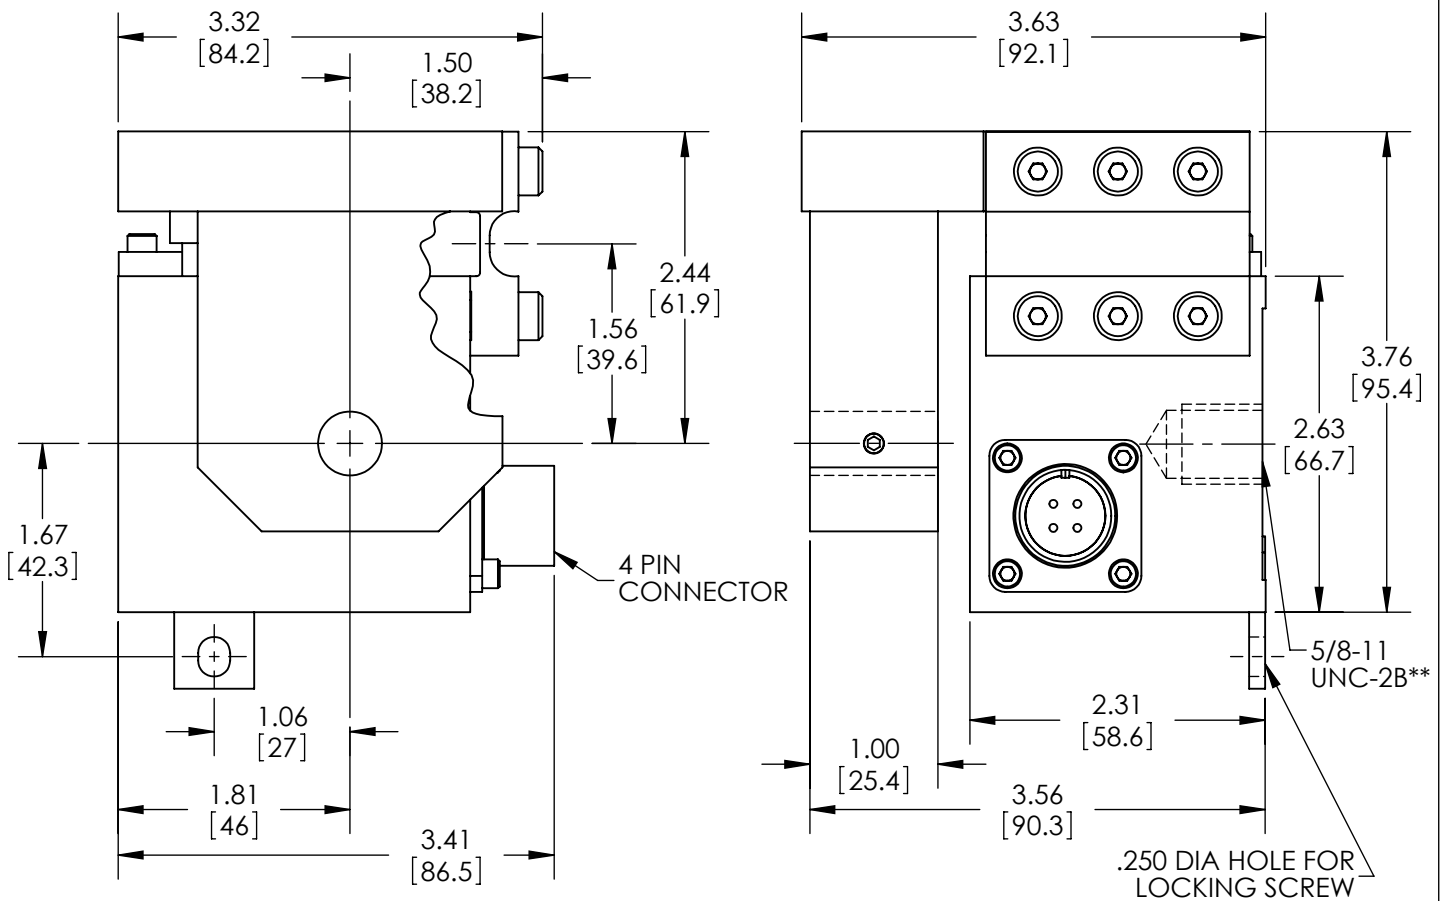

W1 UNIT SHOWN HERE. W2 UNIT IS AVAILABLE.

SHAFT SPECIFICATIONS																
INCHES	.125	.250	.375	.500	.625	.750	.875	1.00	1.125	1.250	1.375	1.50				
CODE	02	04	06	08	10	12	14	16	18	20	22	24				
TAP SIZE	8-32	10-32	1/4-20	1/4-28	5/16-18	5/16-24	3/8-16	3/8-24	7/16-14	7/16-20	1/2-13	1/2-20	5/8-11	5/8-18	3/4-10	3/4-16
CODE	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60
METRIC TAP	M3 x .5	M4 x .7	M5 x .8	M6 x 1.0	M8 x 1.25	M10 x 1.5	M12 x 1.75	M14 x 2.0	M16 x 2.0	M18 x 2.5	M20 x 2.5					
CODE	70	72	74	76	78	80	82	84	86	88	90					

\*Tensioncells in this range supplied for shaft sizes up to maximum 3/4" diameter unless approved by factory.  
\*\*Comptrol wall mount Tensioncells are mounted with a 5/8-11 UNC-2B bolt at the roll centerline and a locking screw through the locating tab which maintains rotational position of the Tensioncell.